


Mechanical Dimensions: Inches [mm]

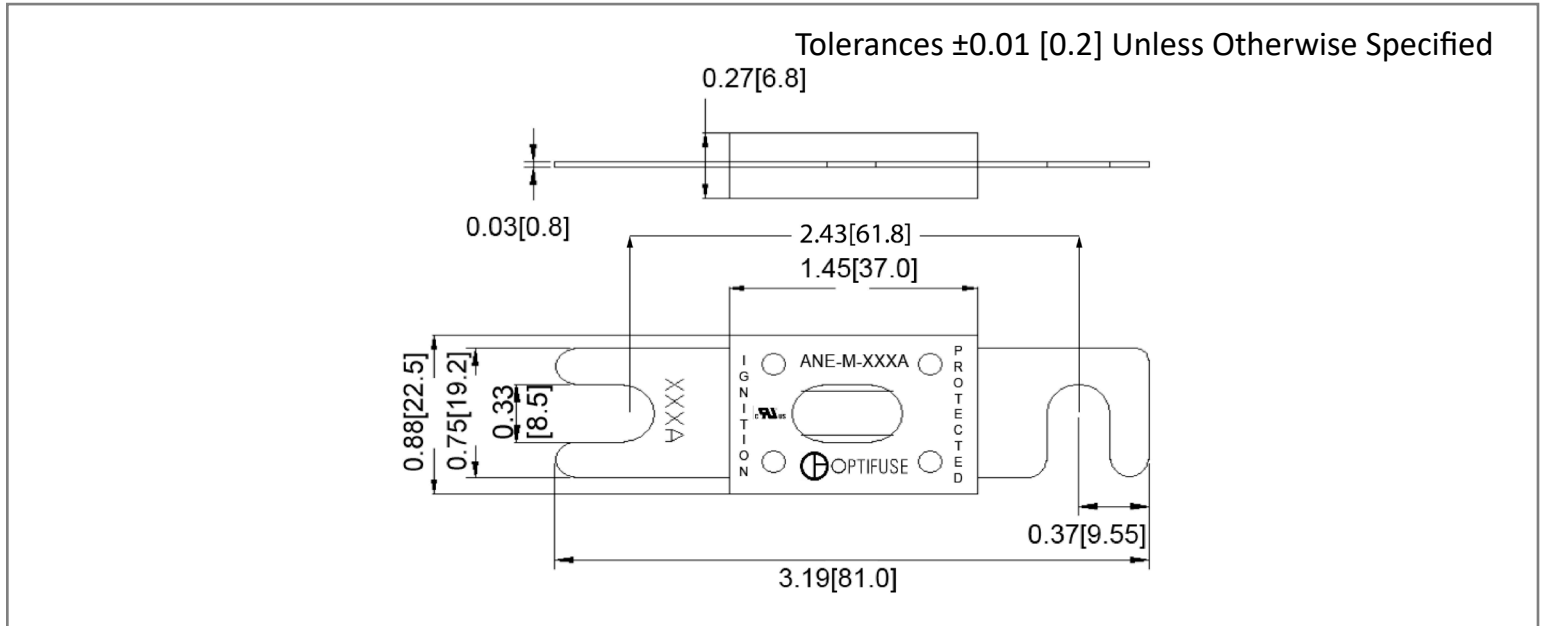

Part Numbers Information

Part Number	Amperage
ANE-M-40A	40
ANE-M-50A	50
ANE-M-60A	60
ANE-M-80A	80
ANE-M-100A	100
ANE-M-125A	125
ANE-M-150A	150
ANE-M-175A	175
ANE-M-200A	200
ANE-M-225A	225
ANE-M-250A	250
ANE-M-275A	275
ANE-M-300A	300
ANE-M-325A	325
ANE-M-350A	350
ANE-M-400A	400
ANE-M-450A	450
ANE-M-500A	500
ANE-M-600A	600



Electrical Specifications

Voltage	125VDC
Interrupting Rating	6000A @ 125VDC (ABYC E-11)
Certifications	

Material Specifications

Ignition Protected Bolt On Limiter Fuse	
Body Material	Fiberglass
Ignition Protected	SAE J1171
Terminals Material	Copper Alloy, Silver Plated

Time-Current Curve

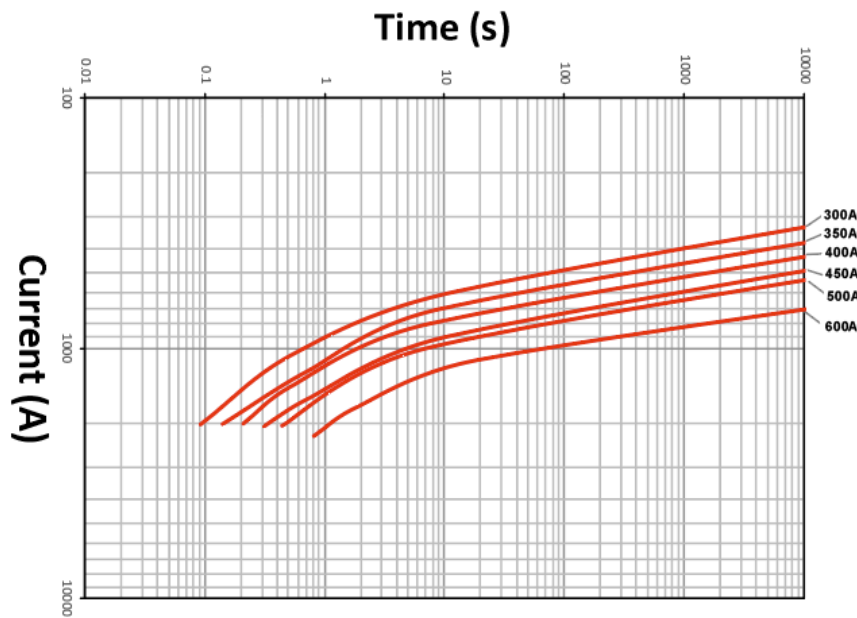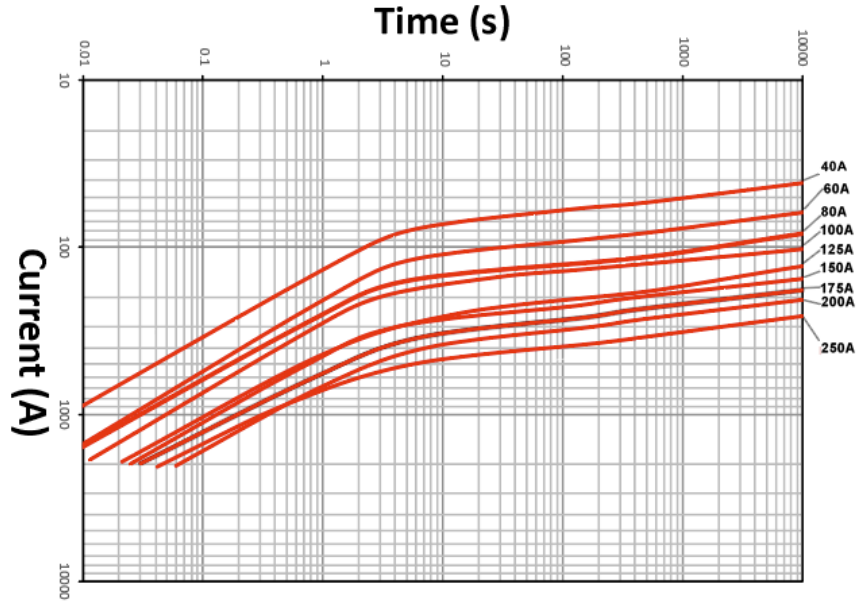

Time vs. Percent of Rated Current

% of Rated Current	Opening Time			
	40-200A		225A-600A	
	Min	Max	Min	Max
150%	1hr.	-	-	-
160%	-	-	60s	-
220%	-	60s	-	60s
250%	0.8s	10s	0.8s	10s
400%	0.2s	2s	0.2s	2s

Rev	Date of issue	Revision Notes	Designed	Approved
D	05-30-2024	Updated Electrical Specifications	RC	OF