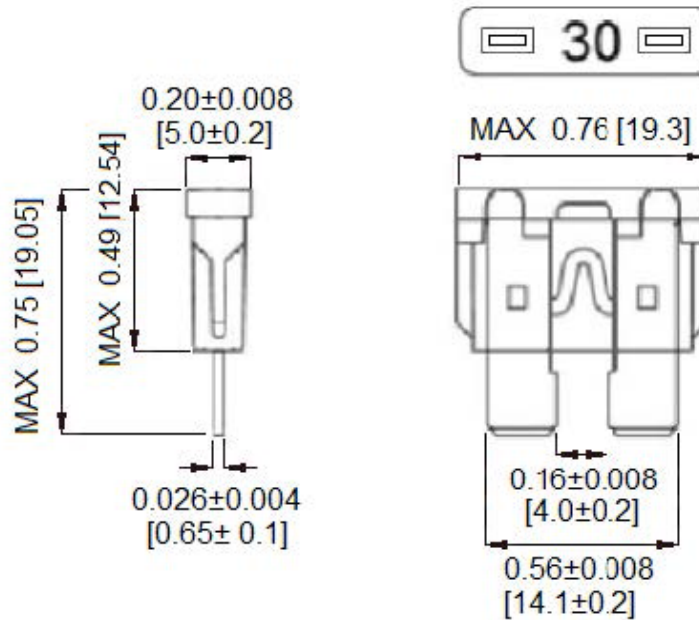


Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

Part Numbers Information

Amperage	Body Color	Bulk Part #
2A	Gray	APR-I-2A
3A	Violet	APR-I-3A
4A	Pink	APR-I-4A
5A	Tan	APR-I-5A
7.5A	Brown	APR-I-7.5A
10A	Red	APR-I-10A
15A	Blue	APR-I-15A
20A	Yellow	APR-I-20A
25A	Clear/White	APR-I-25A
30A	Green	APR-I-30A
35A	Blue Green	APR-I-35A
40A	Orange	APR-I-40A

Electrical Specifications

Voltage Rating 32VDC

Interrupting Rating 1000A @ 32VDC

Designed to meet ISO 8820 Standards


Material Specifications

Body Material PC

Terminal Material Zinc Alloy

Indicating LED when fuse is opened

Time vs Percent of Rated Current

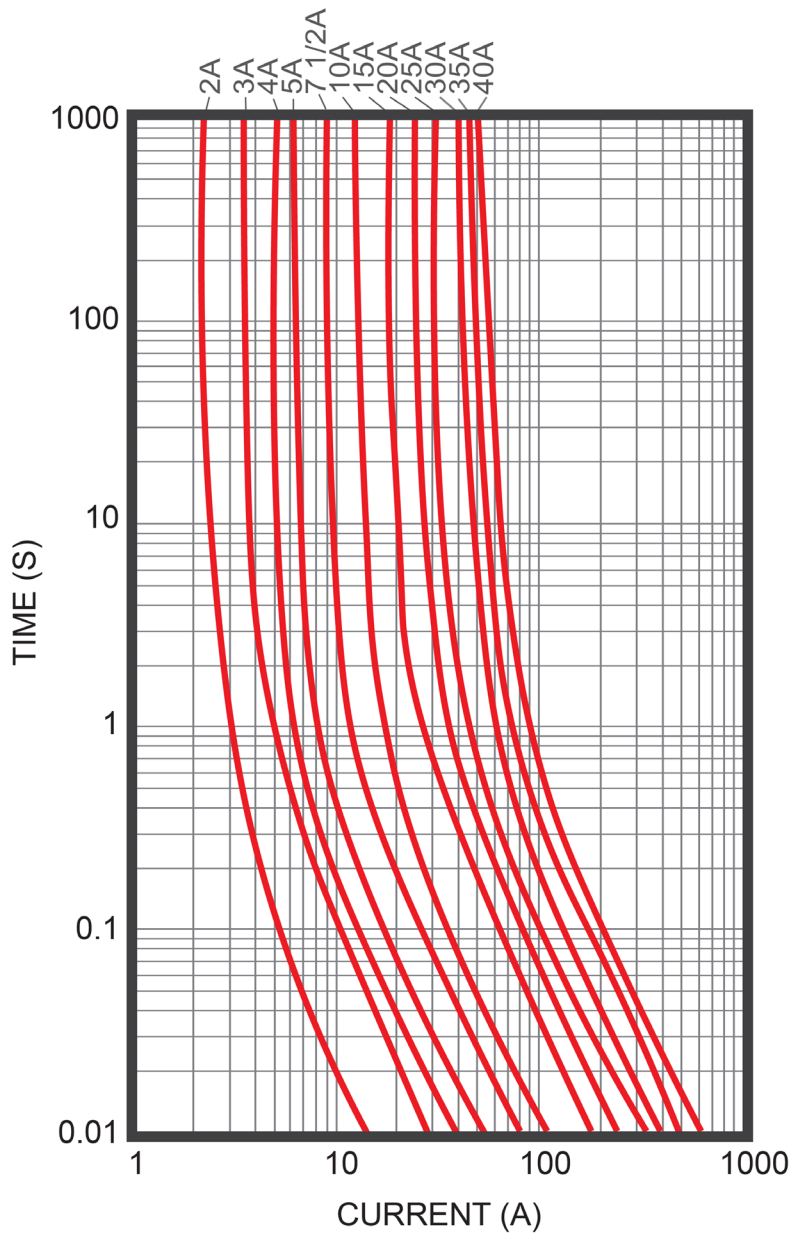

% of Rated Current	Current Rating	Min Hold Time	Max Hold Time
110%	2-40Amp	100h	~
135%	2-40 Amp	~	1800s
150%	2 Amp	~	1800s
200%	2-40 Amp	~	5s

Rev Date of issue Revision Notes

Designed Approved

G	03-12-2025	Initial Drawing	RC	OF
---	------------	-----------------	----	----