

Mechanical Dimensions: Inches [mm]

Tolerances ±0.012 [0.3] Unless Otherwise Specified $3.36\pm0.02[85.25\pm0.5]$ 1.09±0.02 [27.6±0.5] 0.64±0.02 1.26±0.02 [16.2±0.5] [32.0±0.5] Ø0.22[5.5] with Ø0.41[10.4] deep recesses -4 places 0.83±0.02 [21.0±0.5] -3.13±0.02[79.5±0.5]

Electrical Specifications


Volate Rating	32VDC
Current Rating (Combined Circuits)	100A
Current Rating (Max Input)	25A
Line Side Connection	#10-32 Studs
Load Side Connection	0.25" Quick Connect

Material Specifications

•		
8 Circuits		
Body Material	Polycarbonate (UL94V-2)	
Terminal Material	Copper (Tin Plated)	
Accepts Regular (ATO/ATC Style) Blade Fuses		
For cover please ask us about our BLC-108-C		



Isometric View

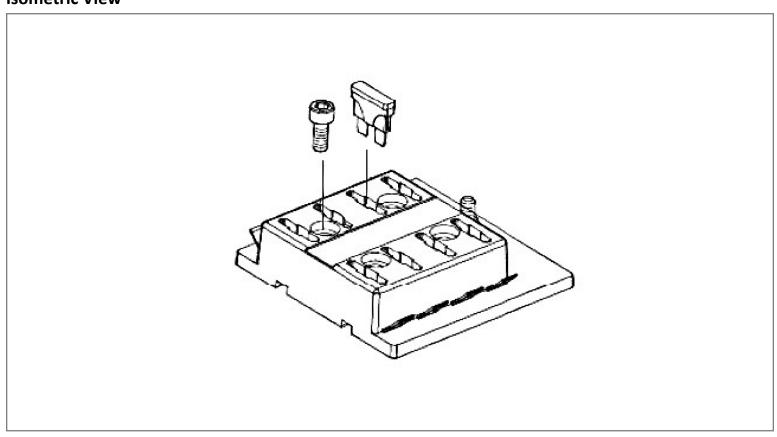

Notes	Revision No	f issue	ev Date	Re
-------	--------------------	---------	---------	----

Designed Approved

D 07-08-2024 Updated to new style; Corrected combined circuit rating RC OF