


**Mechanical Dimensions: Inches [mm]**

Tolerances  $\pm 0.012$  [0.3] Unless Otherwise Specified

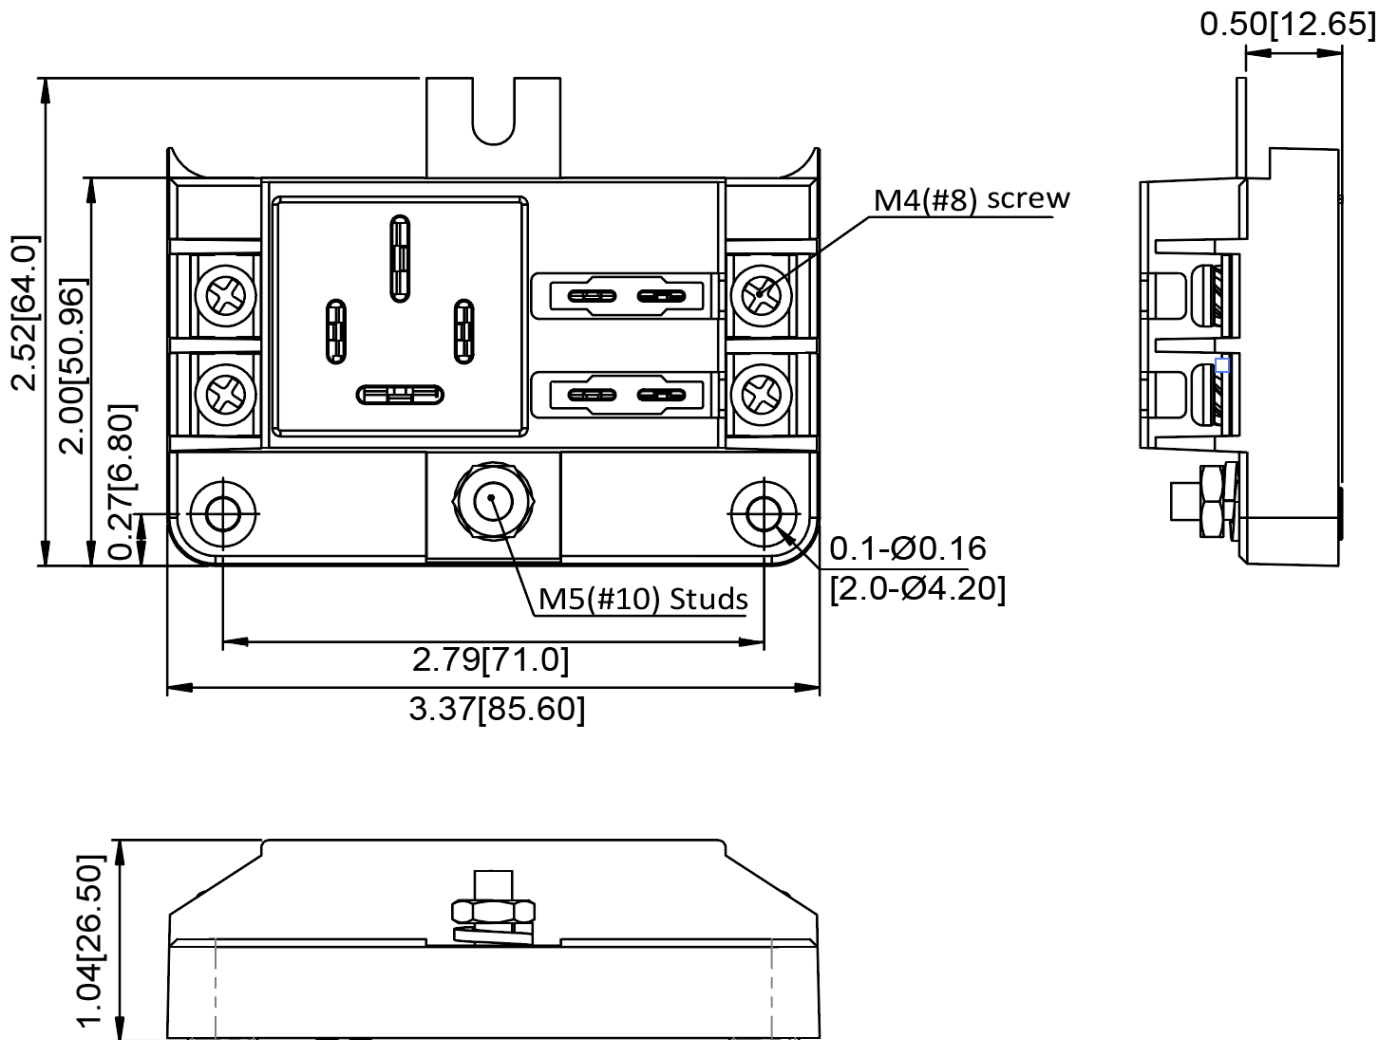

**Electrical Specifications**

<b>Voltage Rating</b>	32 VDC
<b>Current Rating (Max Input)</b>	80A Positive Bus Bar
<b>Current Rating (Per Circuit)</b>	30A
<b>Temperature Rating</b>	-20°C ~ 120°C

Relay control module to turn on or cut power to the attached fuse block

Accepts 4pin automotive relay (Up to 80A)

Two always on automotive blade fuse (APR/ATC/ATO) slots

**Material Specifications**


**Load-side Connection** M4 (#8) Screw terminals

**Line-side Connection** M5 (#10) Studs


Modular design allows seamless integration into BLR-I-1206-G and BLR-I-1212-G

For use with RYA2-1A-12VDC relay (relay not included)

Isometric view

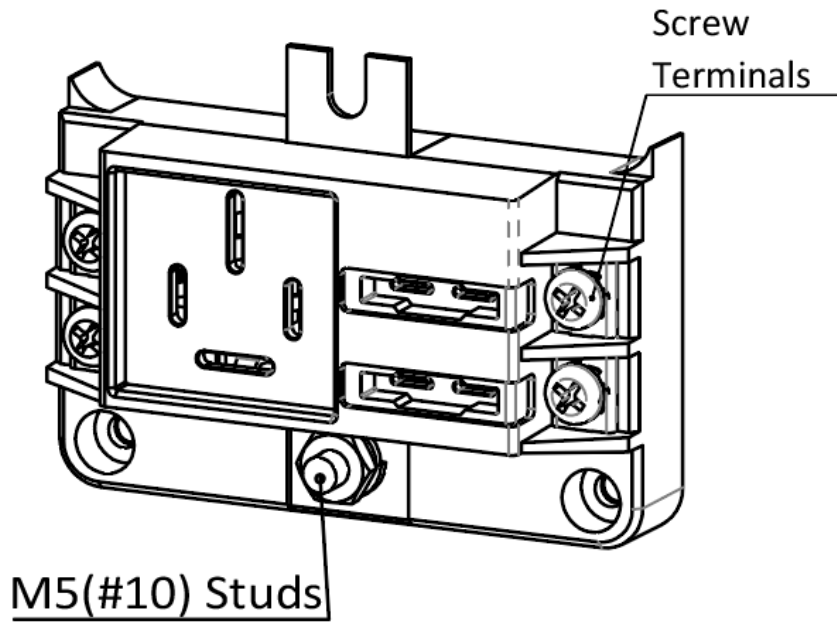

Wiring Information

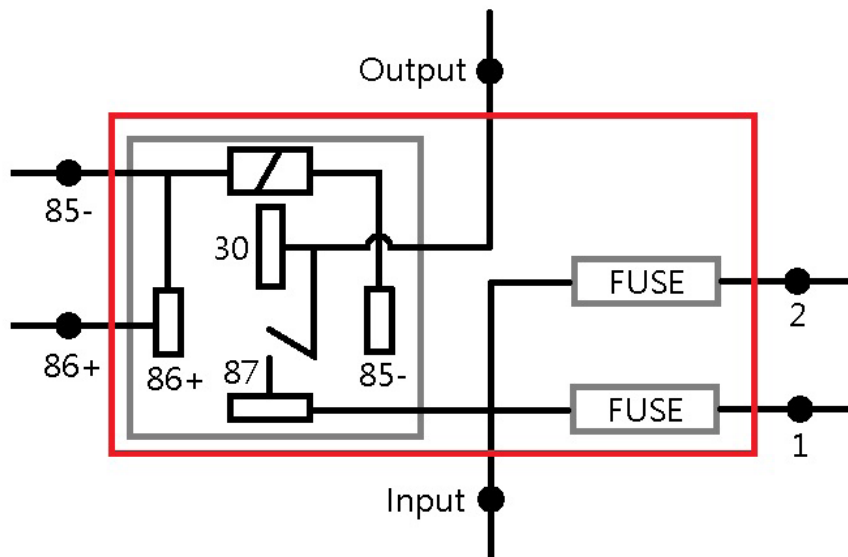

Rev Date of issue Revision Notes

Designed Approved

E	04-09-2024	Added Wiring Information	RC	OF
---	------------	--------------------------	----	----