## Type BLR-I-606 **Fuse Block - Indicating** 6 Pole – Regular Auto Blade



www.optifuse.com

(619) 593-5050

## **Specifications:**

Fuse Type: Regular Auto Blade – APR, ANR Series Max Current Rating: 30A per Circuit - 100A Max Input

Max Voltage: 32VDC


IP Rating: 40 **Material:** Base: PBT

**Terminals:** Copper, tin plated

0.250" [6.3mm] Quick Connect Terminals

**Cover:** PC (Transparent) **Indicating LED** – Red

**Temperature Rating:**  $-20^{\circ}$  C  $\sim +85^{\circ}$  C

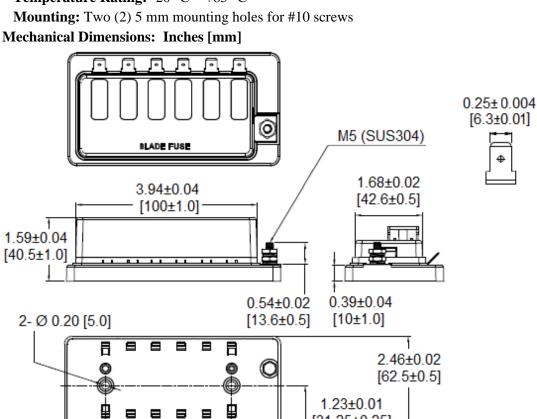

1.22±0.02 [31±0.5]



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

[31.25±0.25]

Note: All specifications subject to change without notice.

2.52±0.02 [64 0.5]

4.76 0.02 [121±0.5]

> Rev A 05/2018 - Page: 1/1 Code S02-01H