

Type FXF Subminiature Fast Acting Fuse - 3.6 x 10mm



www.optifuse.com

(619) 593-5050

Agency Standards and Listings:



Time Characteristics:

100%	4h Min.
200%	60s Max.


Interrupt Rating:

200mA ~ 15A 50A at 350 VAC


Packaging:

1,500 pieces taped and ammo pack

Time Current Curve Graph

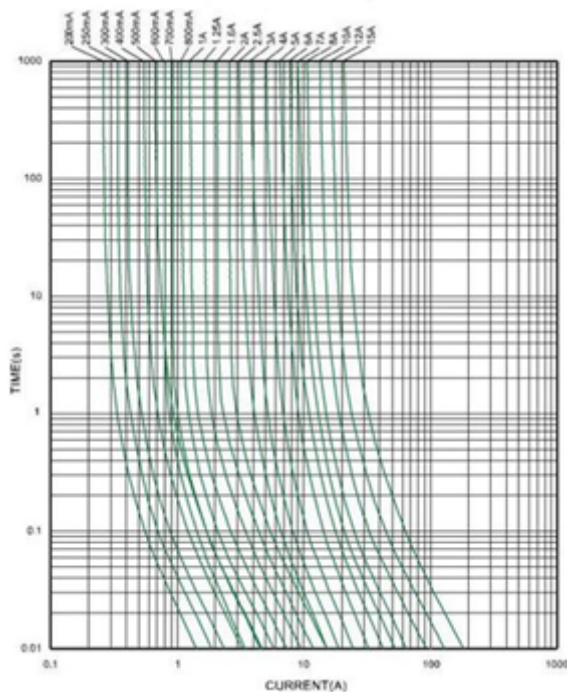

Mechanical Dimensions:

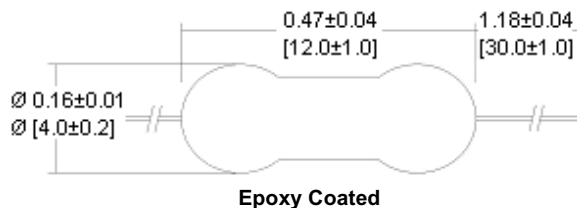

Part Number	Amperage	Safety Approval UL / CUL	Rated Voltage (VAC)	I ² T Reference A ² Sec
FXF-200mA	200mA		350V	0.0200
FXF-250mA	250mA			0.0352
FXF-300mA	300mA			0.0562
FXF-315mA	315mA			0.0620
FXF-350mA	350mA			0.0765
FXF-375mA	375mA			0.0878
FXF-400mA	400mA			0.107
FXF-500mA	500mA			0.219
FXF-600mA	600mA			0.118
FXF-630mA	630mA			0.130
FXF-700mA	700mA			0.208
FXF-750mA	750mA			0.239
FXF-800mA	800mA	•		0.319
FXF-1A	1A	•		0.542
FXF-1.2A	1.2A	•		0.746
FXF-1.25A	1.25A	•		0.776
FXF-1.5A	1.5A	•		1.684
FXF-1.6A	1.6A	•		1.763
FXF-2A	2A	•		2.291
FXF-2.25A	2.25A	•		2.912
FXF-2.5A	2.5A	•		2.290
FXF-3A	3A	•		3.548
FXF-3.15A	3.15A	•		3.912
FXF-3.5A	3.5A	•		4.856
FXF-4A	4A	•		5.998
FXF-5A	5A	•		10.57
FXF-6A	6A	•		17.86
FXF-6.3A	6.3A	•		19.69
FXF-7A	7A	•		27.54
FXF-8A	8A	•		41.28
FXF-9A	9A	•		58.72
FXF-10A	10A	•		85.90
FXF-12A	12A	•		167.5
FXF-15A	15A	•		325.0

• Approved

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.