

# Type LPM-08-L (Left Hand Exit) “Add-On” Automotive Fuse Holder Mini. Automotive Blade Type Fuse



www.optifuse.com

(619) 593-5050

Rating: 125VDC

Max Combined Current - Both Circuits - 40A

Max Primary Circuit - 30A

Max Auxiliary Circuit - 20A

Body Material: Nylon PA66 UL94V-0


Terminals: Tin plated Brass

For use with Type APM, ANM Fuse (Miniature Automotive Blade Type)

Wire: 16 AWG Red Wire, UL1015 105°C

Connector: Butt-Splice Connector

## Mechanical Dimensions: Inches [mm]

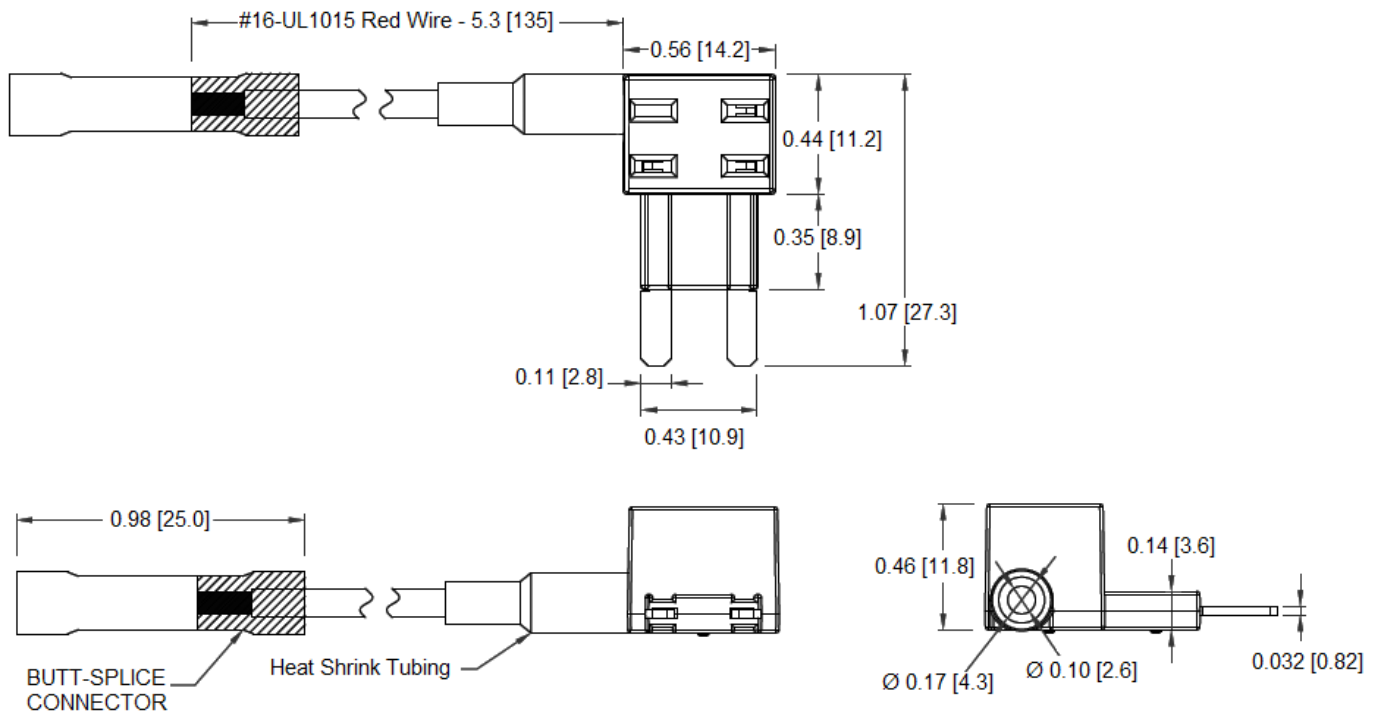

### Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev C 07/2024 - Page: 1/1  
Code G02-01H