## **Type LPT-08-3**

## "Add-On" Automotive Fuse Holder Micro2 Automotive Blade Type Fuse Total 3 Circuits



www.optifuse.com

(619) 593-5050

For use with Type APT, ANT Fuses (Tiny, Micro2 Automotive

Blade) Rating: 125VDC

Max Installation Current Rating:


Existing Circuit: 30AAdd-on Circuit: 20A

Body Material: Nylon with Glass Fiber (UL 94V-0), Black

Terminals: Brass, Tin plated

Wire: # 16 AWG UL 1015 Red Wire Connector: Butt-Splice Connector

## **Mechanical Dimensions: Inches [mm]**

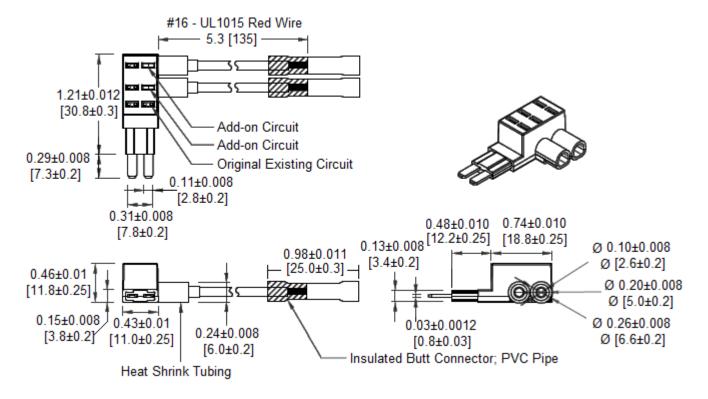

## Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications and dimensions subject to change without notice.

Rev B 07/2024 - Page: 1/1

Code G02-01H