Type PMA-KS-02-Q1S (formerly PKA-03)
Panel Mount Fuse Holder
¼" x 1¼" (6.3 x 32mm) Fuses
Knob / Screw

OPTIFUSE

Electrical Rating: 10A, 250V AC
Fuse Style: ¼" x 1¼" (6.3 x 32mm)
Material:
  Frame and Cap: Phenolic (UL flame: 94V-1)
  Terminals: Nickel-plated brass
Cap: Knob type, Screw type
Mounting: by nut
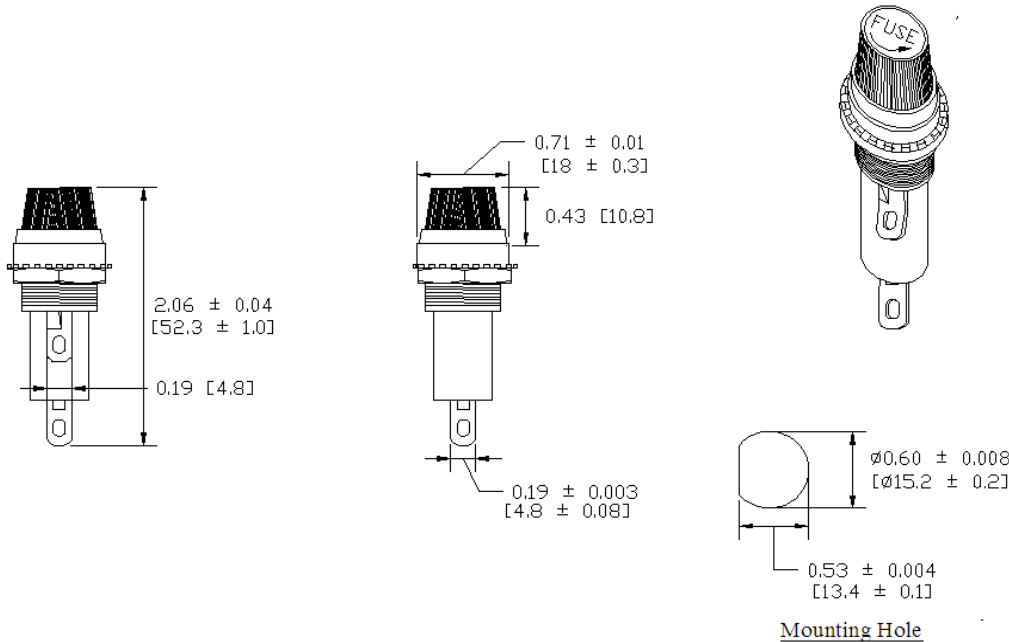**Terminal:** Solder 4.2mm / 0.163", Solder/Quick-Connect 4.8mm / 0.187"
Panel Thickness: 0.5 ~ 4.5mm
Agency Standards and Listings:

UL

Product Dimensions: Inches [mm]

0.71 ± 0.01 [18 ± 0.3]

0.43 [10.8]

2.06 ± 0.04 [52.3 ± 1.0]

0.19 [4.8]

0.19 ± 0.003 [4.8 ± 0.08]

Ø0.60 ± 0.008 [Ø15.2 ± 0.2]

0.53 ± 0.004 [13.4 ± 0.1]

Mounting Hole

Warning: ⚠	-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.