Type PMA-KS-05-Q1R
Panel Mount Fuse Holder
¼" x 1¼" (6.3 x 32mm) Fuses
Knob / Screw

OPTIFUSE

www.optifuse.com   (619) 593-5050

Electrical Rating: 15A, 250V AC
Fuse Style: ¼" x 1¼" (6.3 x 32mm)
Material:
  Frame and Cap: PBT (UL flame: 94V-0)
  Terminals: Tin-plated brass
Cap: Knob type, Screw type
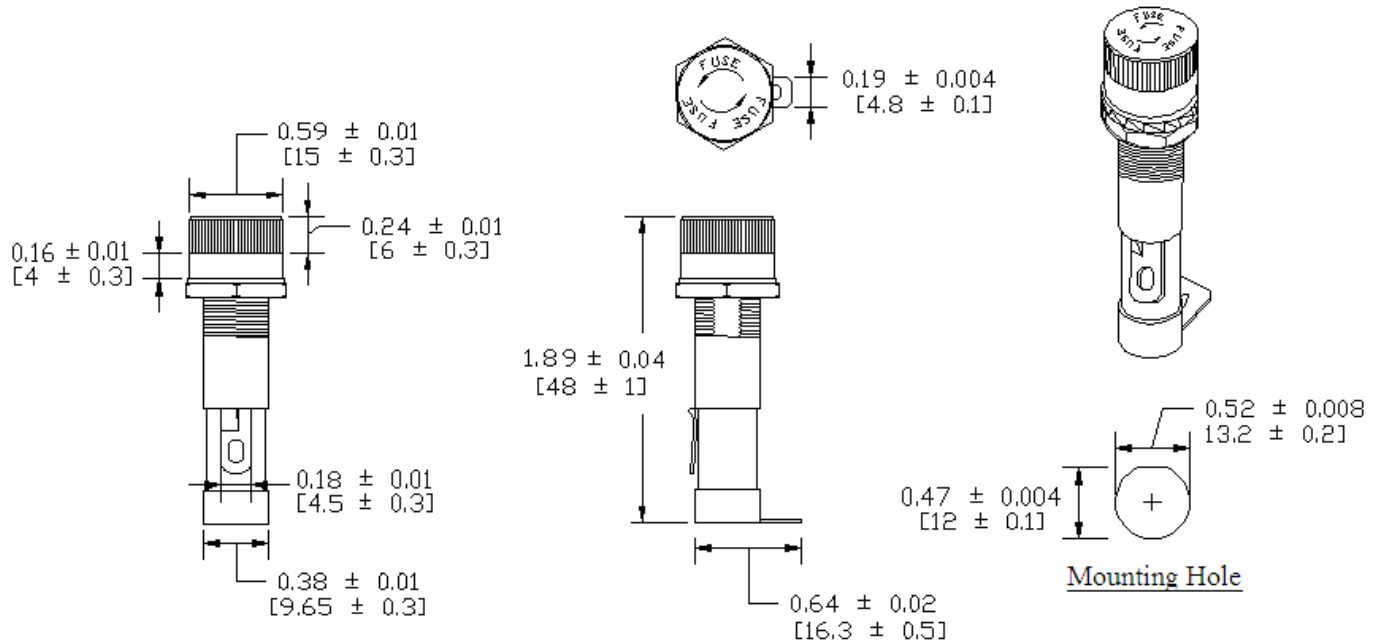**Mounting:** by nut
Terminal: Solder/Quick-Connect 4.8mm / 0.187"
Panel Thickness: 4.5mm MAX
Agency Standards and Listings:

RU

Product Dimensions: Inches [mm]

0.59 ± 0.01
[15 ± 0.3]

0.24 ± 0.01
[6 ± 0.3]

0.16 ± 0.01
[4 ± 0.3]

0.18 ± 0.01
[4.5 ± 0.3]

0.38 ± 0.01
[9.65 ± 0.3]

0.19 ± 0.004
[4.8 ± 0.1]

1.89 ± 0.04
[48 ± 1]

0.64 ± 0.02
[16.3 ± 0.5]

0.52 ± 0.008
13.2 ± 0.2]

0.47 ± 0.004
[12 ± 0.1]

Mounting Hole

Warning:	-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.