## Type PMA-PB-01-SOS Panel Mount Fuse Holder <sup>1</sup>/<sub>4</sub>" x 1<sup>1</sup>/<sub>4</sub>" (6.3 x 32mm) Fuses Push Button / Bayonet




www.optifuse.com (619)

(619) 593-5050

Electrical Rating: 10A, 250V AC Fuse Style: <sup>1</sup>/<sub>4</sub>" x 1<sup>1</sup>/<sub>4</sub>" (6.3 x 32mm) Material: Frame: Phenolic (UL flame: 94V-1) Cap: Nylon (UL flame: 94V-2) Terminals: Nickel-plated brass Cap: Push Button to Release Mounting: by metal nut with white washer Terminal: Solder 3.8mm / 0.148", Solder/Quick-Connect 4.0mm / 0.156" Panel Thickness: 0.5 ~ 4.5mm Agency Standards and Listings:



**Product Dimensions: Inches [mm]** 

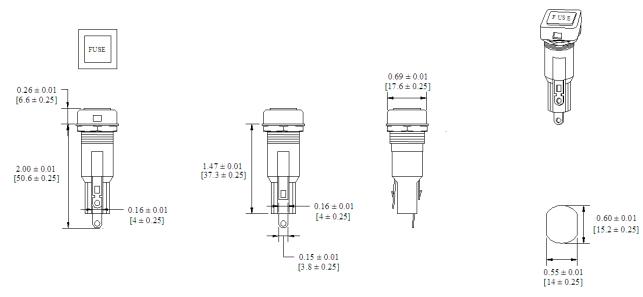

Mounting Hole



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.