Type PMA-PB-01-SOS
Panel Mount Fuse Holder
¼” x 1¼” (6.3 x 32mm) Fuses
Push Button / Bayonet

www.optifuse.com (619) 593-5050

Electrical Rating: 10A, 250V AC
Fuse Style: ¼” x 1¼” (6.3 x 32mm)
Material:
Frame: Phenolic (UL flame: 94V-1)
Cap: Nylon (UL flame: 94V-2)
Terminals: Nickel-plated brass
Cap: Push Button to Release
Mounting: by metal nut with white washer
Terminal: Solder 3.8mm / 0.148”, Solder/Quick-Connect 4.0mm / 0.156”
Panel Thickness: 0.5 ~ 4.5mm
Agency Standards and Listings:

Product Dimensions: Inches [mm]

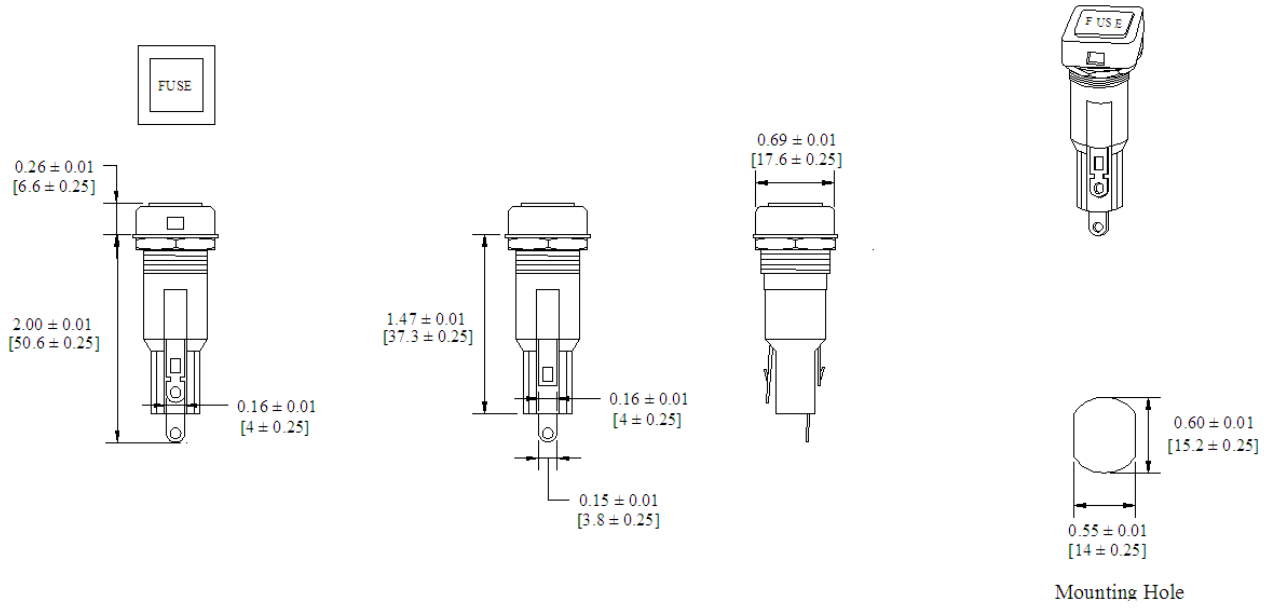

Warning:	-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.