

# Type PMC-KB-06-Q1S

## Panel Mount Fuse Holder

### 5 x 20 mm Fuses

### Knob / Bayonet



www.optifuse.com

(619) 593-5050

**Electrical Rating:** 15A, 250V AC

**Fuse Style:** 5 x 20mm

**Material:**

**Frame:** Phenolic (UL flame: 94V-1)

**Cap:** PBT (UL flame: 94V-0)

**Terminals:** Tin-plated brass

**Cap:** Knob type, Bayonet type

**Mounting:** by nut


**Terminal:** Solder/Quick-Connect 4.8mm / 0.187"

**Panel Thickness:** 0.5 ~ 4.5mm

**Agency Standards and Listings:**



**Product Dimensions: Inches [mm]**

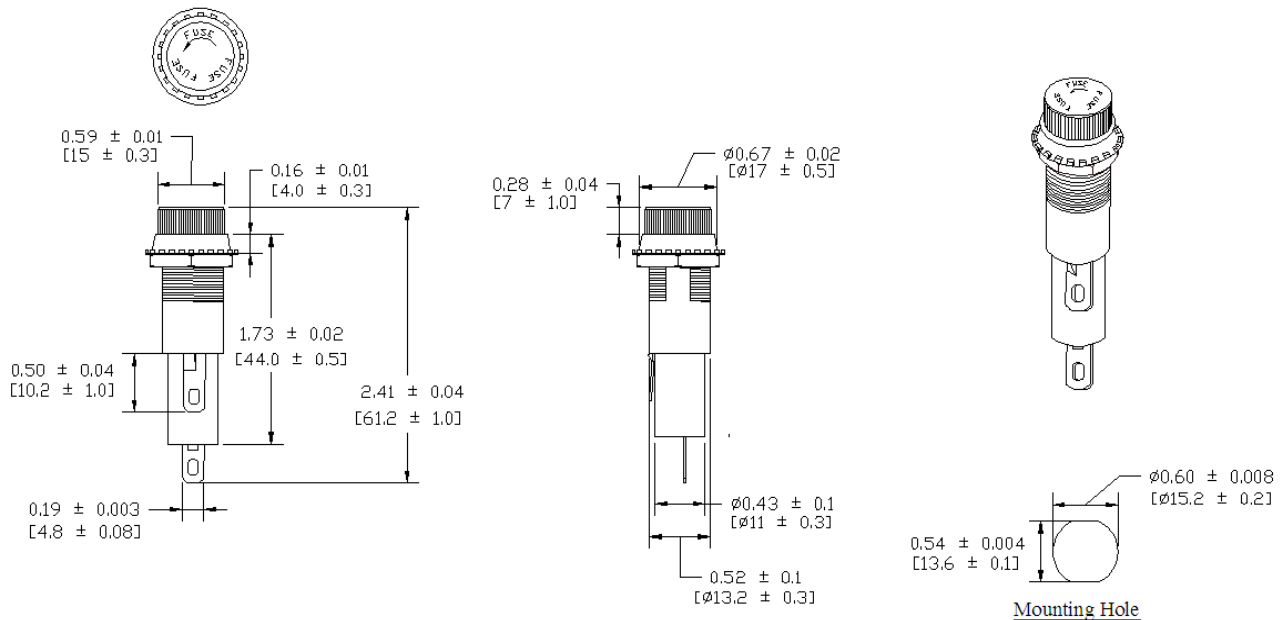

#### Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse.
- Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 01/2008 - Page: 1/1  
Code S02-02D