

**Type PMC-KS-01-SOS (formerly PKC-01)**  
**Panel Mount Fuse Holder**  
**5 x 20 mm Fuses**  
**Knob / Screw**



www.optifuse.com (619) 593-5050

**Electrical Rating:** 10A, 250V AC

**Fuse Style:** 5 x 20mm

**Material:**

**Frame and Cap:** Phenolic (UL flame: 94V-2)

**Terminals:** Nickel-plated brass

**Cap:** Knob type, Screw type

**Mounting:** by metal nut with white washer

**Ingress Protection:** IP40


**Terminal:** Solder 4.0mm / 0.156"

**Panel Thickness:** 4.5mm MAX

**Agency Standards and Listings:**



**Product Dimensions: Inches [mm]**

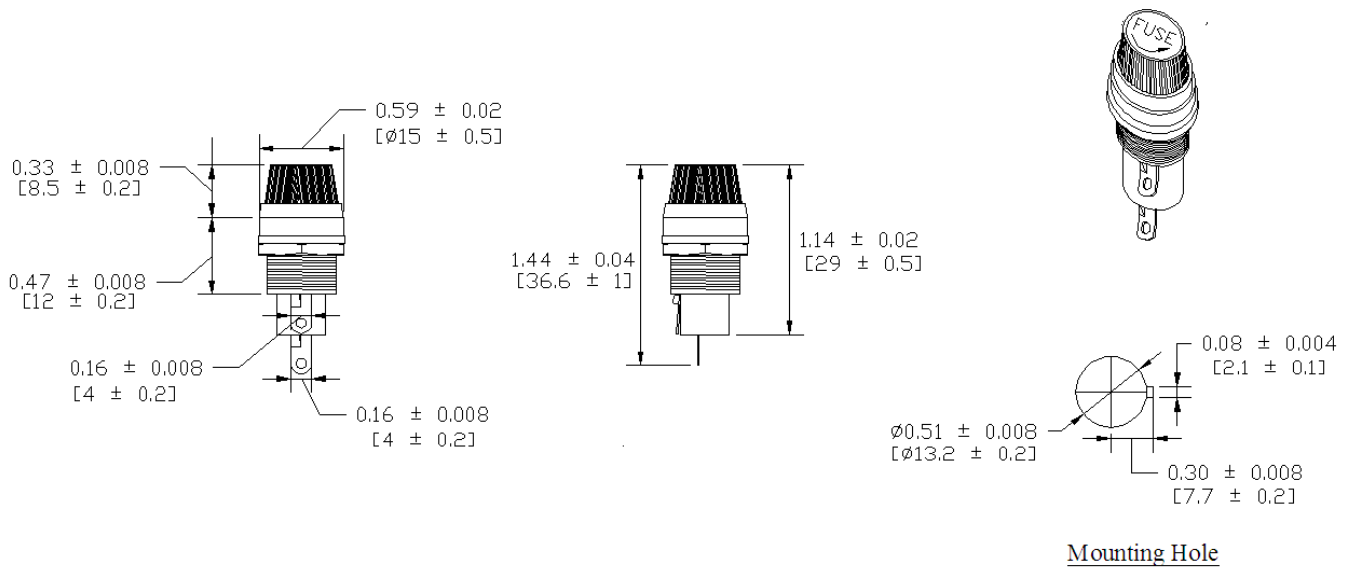

Mounting Hole

**Warning:**



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse.
- Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev B 05/2024 - Page:  
 1/1 Code S02-02D