


**Mechanical Dimensions: Inches [mm]**

Unless otherwise specified all tolerances are +/- 0.02in (0.5mm)

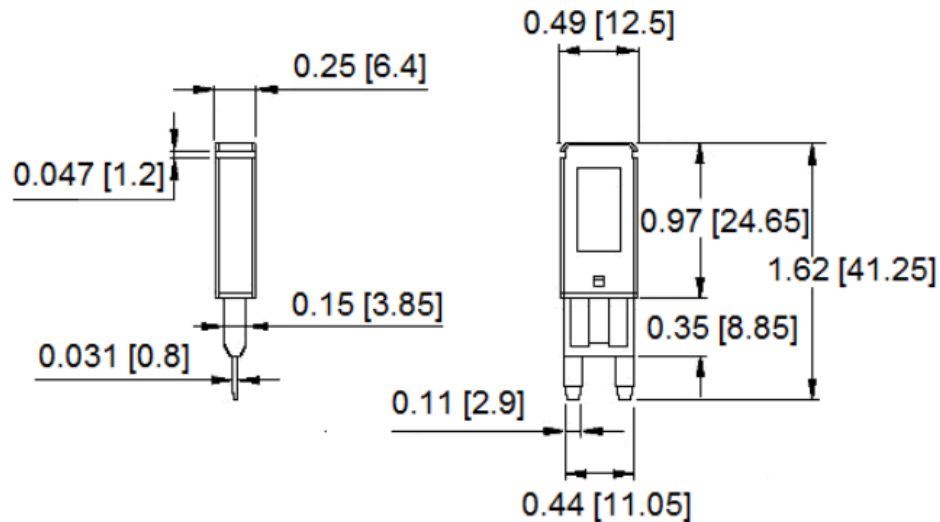

**Part Numbers Information**

Optifuse P/N	Amperage	Body Color
ACBP4-PML-5A	5A	Tan
ACBP4-PML-7.5A	7.5A	Brown
ACBP4-PML-10A	10A	Red
ACBP4-PML-15A	15A	Blue
ACBP4-PML-20A	20A	Yellow
ACBP4-PML-25A	25A	White
ACBP4-PML-30A	30A	Green

**Electrical Specifications**

<b>Voltage Rating</b>	14VDC
<b>Reset Type</b>	Type I - Auto Reset
<b>Operation Temperature</b>	-40° C ~ 85° C
<b>Testing</b>	SAE J553 Type I


**Material Specifications**

Extended Body, Miniature Blade Circuit Breaker	
<b>Body Material</b>	Thermoplastic - (UL Rated 94V-0)
<b>Terminals Material</b>	Tin Plated Copper Alloy

**Interrupt Rating**

<b>Ampere Rated</b>	<b>Interrupt Rating</b>
5A-10A version	150A @ 14 VDC
15A version	225A @ 14 VDC
20A version	300A @ 14 VDC
25A-30A version	450A @ 14 VDC

**Time vs. Percent of Rated Current**

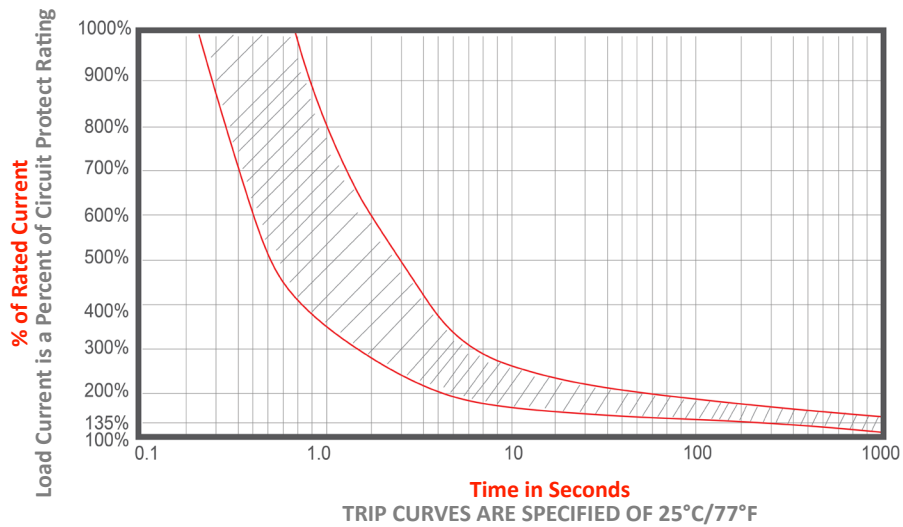

**Rev Date of issue Revision Notes**

**Designed Approved**

B	09-15-2023	updated format	RC	OF
---	------------	----------------	----	----