


**Mechanical Dimensions: Inches [mm]**

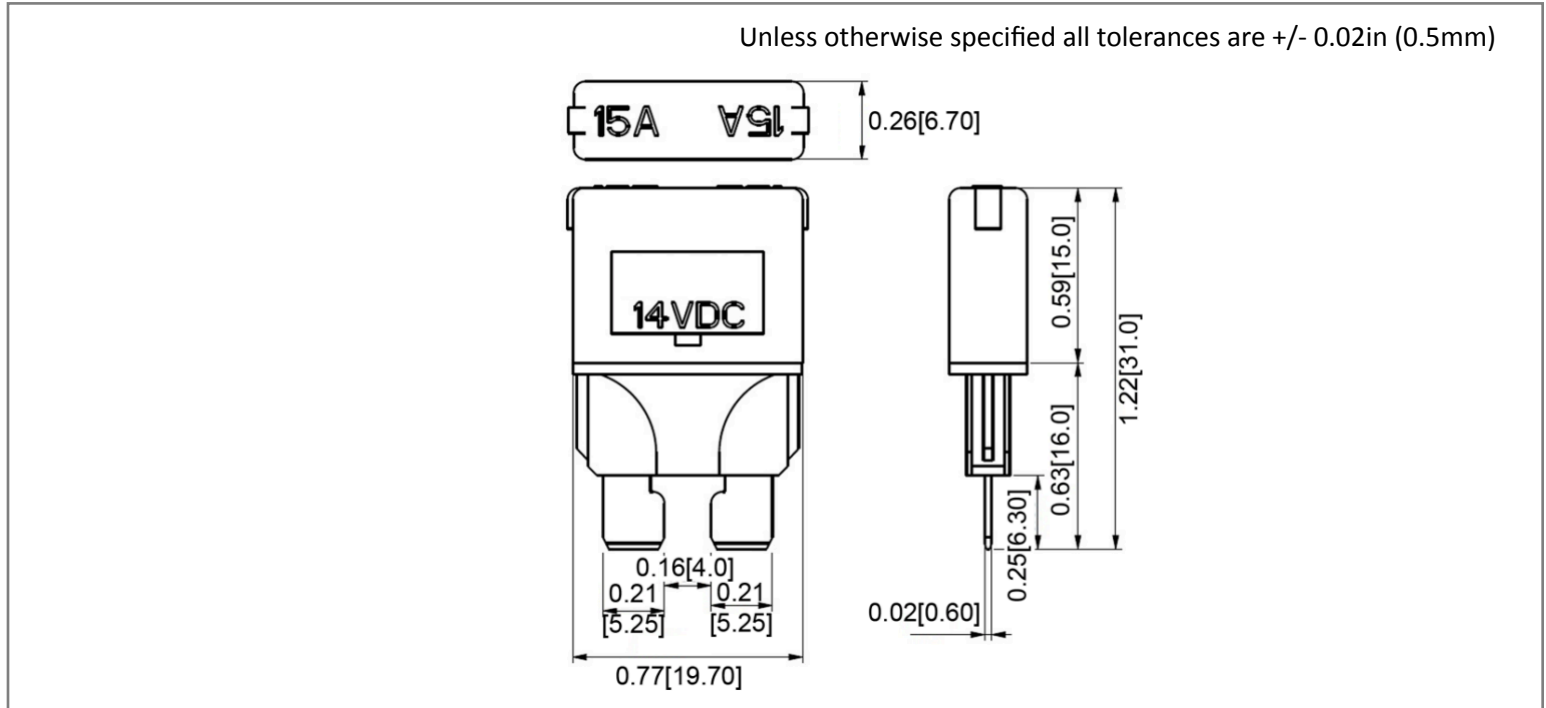

**Part Numbers Information**

Optifuse P/N	Amperage	Body Color
MOCBP4-PL-5A	5	Light Brown
MOCBP4-PL-6A	6	Black
MOCBP4-PL-7.5A	7.5	Brown
MOCBP4-PL-8A	8	Brown
MOCBP4-PL-10A	10	Red
MOCBP4-PL-15A	15	Blue
MOCBP4-PL-20A	20	Yellow
MOCBP4-PL-25A	25	White
MOCBP4-PL30A	30	Green

**Electrical Specifications**

<b>Voltage Rating</b>	14VDC
<b>Reset Type</b>	Type II - Modified Reset
<b>Operation Temperature</b>	-40°C ~ 85°C
<b>Testing</b>	SAE J553


**Material Specifications**

Regular (ATO/ATC Style) Blade Circuit Breaker	
<b>Body Material</b>	Thermoplastic - (UL Rated 94V-0)
<b>Terminals Material</b>	Tin Plated Brass Alloy

**Interrupt Rating**

Ampere Rated	Interrupt Rating
5A-10A version	150A @ 14 VDC
15A version	225A @ 14 VDC
20A version	300A @ 14 VDC
25A-30A version	450A @ 14 VDC

**Time vs. Percent of Rated Current**

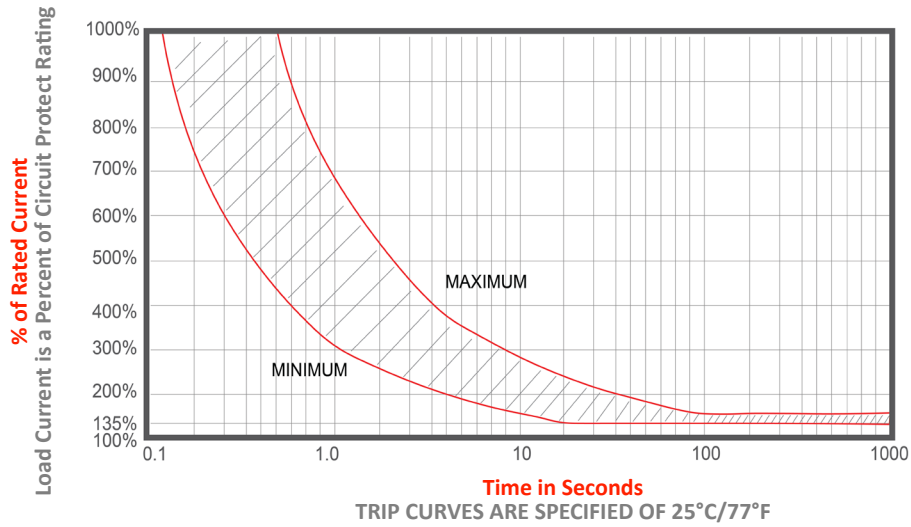

**Rev Date of issue Revision Notes**

**Designed Approved**

B	09-15-2023	updated format	RC	OF
---	------------	----------------	----	----